


optimax HF Endlose Hochleistungs-Flachriemen High Performance Flat Belts

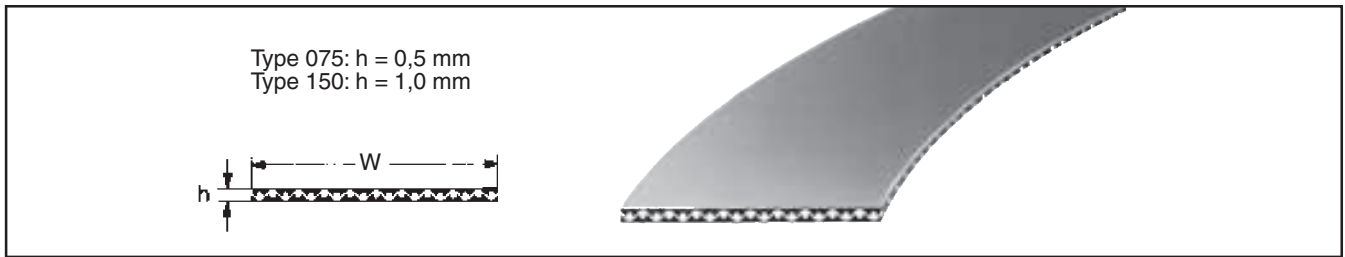

Optimax HF Type 075, Type 150 Standard-Sortiment <i>Standard range</i> Optimax HF Type 150 (L _i mm)								
400	650	890	1130	1380	1630	1890	2210	2700
410	660	900	1140	1390	1640	1900	2220	2750
420	670	910	1150	1400	1650	1920	2240	2780
430	680	920	1160	1410	1660	1930	2250	2800
440	690	930	1170	1420	1670	1940	2270	2850
450	695	935	1180	1430	1680	1950	2280	2900
460	700	940	1190	1440	1700	1960	2290	2950
470	710	950	1200	1450	1710	1970	2300	3000
480	720	960	1210	1460	1720	1980	2320	3050
490	730	970	1220	1470	1730	2000	2340	3100
500	740	980	1230	1480	1740	2020	2350	3150
510	750	990	1240	1490	1750	2030	2370	3200
520	760	1000	1250	1500	1760	2040	2380	3250
530	770	1010	1260	1510	1770	2050	2400	3300
540	780	1020	1270	1520	1780	2060	2430	3400
550	790	1030	1280	1530	1790	2070	2440	3500
560	800	1040	1290	1540	1800	2090	2450	3600
570	810	1050	1300	1550	1810	2100	2480	
580	820	1060	1310	1560	1820	2110	2500	
590	830	1070	1320	1570	1830	2120	2520	
600	840	1080	1330	1580	1840	2130	2550	
610	850	1090	1340	1590	1850	2140	2570	
620	860	1100	1350	1600	1860	2150	2600	
630	870	1110	1360	1610	1870	2190	2650	
640	880	1120	1370	1620	1880	2200	2660	

Standardbreiten *Standard widths*: 10; 15; 20; 25; 30; 35; 40; 50; 60; 70; 80; 90; 100

Type 150: ab Lager lieferbar *delivery ex stock*; Type 075: keine Lagerware *non stock items*

<p>Breiten Dieses Standard-Sortiment kann in jeder beliebigen Breite bis max. 420 mm geliefert werden.</p> <p>Zwischenlängen Außer diesen Standardlängen kann auf Anfrage jede Länge zwischen 150 und 3800 mm geliefert werden.</p> <p>Weitere Qualitäten und Sonderausführungen auf Anfrage.</p> <p>Aufpreis für Mindermengen Type 150: 1 bis 5 Stück = 25 %</p> <p>Mindest-Abnahmemenge Type 075: 1 Wickel = 420 mm ± 10 %</p> <p>Toleranzen a) Längentoleranz: ± 1 %, mindestens ± 3 mm b) Breitentoleranz: ± 0,5 mm, bis auf ± 0,2 mm reduzierbar</p> <p>Gewicht Type 075 ≈ 0,620 kg/m² Type 150 ≈ 1,210 kg/m²</p>	<p>Widths <i>Above length range can be supplied in every width up to max. 420 mm.</i></p> <p>Intermediate lengths <i>As well as standard lengths, intermediate lengths between 150 and 3800 mm can be supplied on request.</i></p> <p>Further qualities and special constructions on request.</p> <p>Minimum order quantity surcharge <i>Type 150: 1 up to 5 pieces = 25 %</i></p> <p>Minimum order quantity <i>Type 075: 1 sleeve = 420 mm ± 10 %</i></p> <p>Tolerances a) <i>Length tolerance: ± 1 %, minimum ± 3 mm</i> b) <i>Width tolerance: ± 0.5 mm, reducible down to ± 0.2 mm</i></p> <p>Weight <i>Type 075 ≈ 0.620 kg/m² Type 150 ≈ 1.210 kg/m²</i></p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------